

Multimedia Projector

EB-L1100U L1200U L1300U L1405U L1505U L1500U

EPSON
EXCEED YOUR VISION



The next level in 3LCD laser projection




Minimal Maintenance

Reliable, long-lasting laser light source

A newly designed laser light source and advanced electrostatic filter deliver 20,000 hours of maintenance-free use. Inorganic LCD panels and an inorganic phosphor wheel combine with a dustproof design for 20,000 hours of guaranteed use. Additionally, the laser light source is highly reliable, eliminating worry of the light burning out during important presentations.



Maintenance period of laser and lamp*

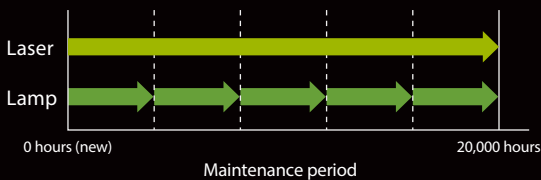


Approximate time until brightness decreases 50% from first usage. Measured by acceleration test assuming use of 0.04 - 0.20 mg/m³ of particulate matter. Time varies depending on usage conditions and environments.

Fine-tuning brightness

EB-L1000 Series provides precise brightness adjustment in increments of 1%. This combined with Constant Brightness mode maintains brightness at a given value to match the venue or subject.

Custom mode with constant brightness

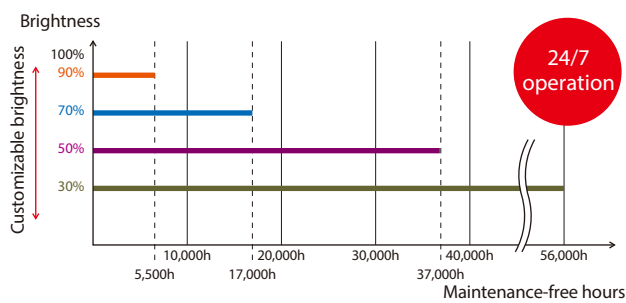

Well-balanced whites

Laser light source produces nicely balanced RGB color for brilliant white highlights that bring a refreshing vibrancy to images.

Previous model




EB-L1000 Series




Auto color adjustment with built-in camera

The built-in camera detects screens that have become unevenly colored over time, allowing the projector to automatically correct color. It also detects subtle color inconsistencies between multiple projectors. This function can be set to check color manually or automatically at regular intervals to deliver stable image quality with minimum maintenance.

Built-in camera

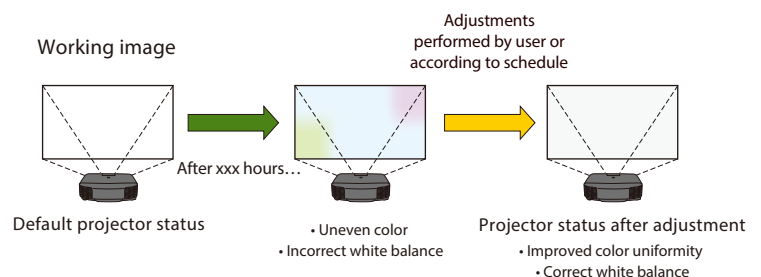

Working image when using multiple projectors

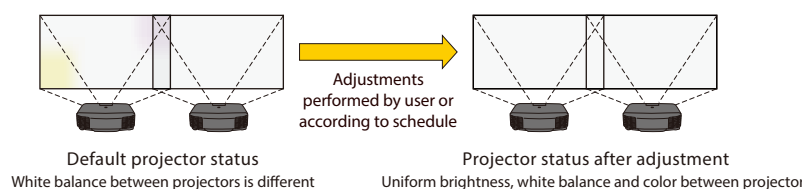

Flexible Installation

Borderless multi projection

A variety of functions are available for multi-projector installations, letting you adjust brightness, color and the position of overlapping areas for seamless, beautiful displays. There is also an Auto Scaling function for easy multi-projector displays and an Advanced Edge Blending function for more precise edge-blending adjustment.


Edge Blending

Blends the border between multiple images to create a seamless display when using multiple projectors.




Color Matching/Brightness Level

Uniform image color and brightness when using multiple projectors.



Scale

Combine portions of a single image displayed by multiple projectors into one large image. This function scales and crops a single image, transforming it into a stunning display without the need for additional equipment.

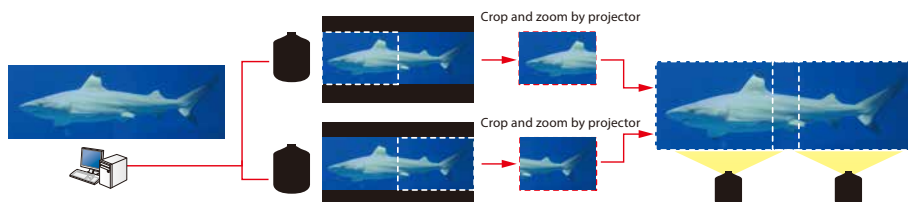


Auto Scaling NEW

Simplify complicated scaling of images from multiple projectors. Just select the screen layout from the preset menu and the projector automatically sets slice area, scaling and edge-blend position.



Advanced Edge Blending NEW

Precisely adjust edge blending to combine multiple edges for a seamless, unified look. This lets you fine-tune the start position and edge width of the blend as well as the area of the black level in the blend. This function also prevents the main subject from being overlapped. You can reduce the size of the overlapping areas to decrease the time it takes to combine multiple images.

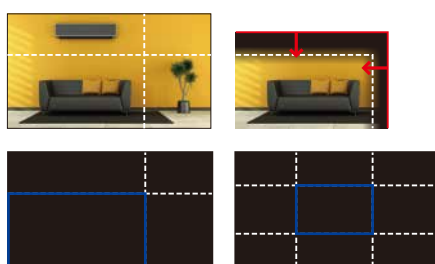

Adjusting black level in the blend to subtly enhance multi-image projections.

Problems with multi-projector installations

- Image positions do not match.
- Colors and brightness do not match.
- Overlapping areas are brighter than other areas in the images.



Epson's superior multi-projection functions solve these problems.


Point Correction

Corrects for misaligned images when using multiple projectors. Images are adjusted point-by-point (from right to left, or up and down) using a matrix projected onto the screen.




Black Level

Uniform black levels in overlapping areas of images when using multiple projectors.



Detailed Color Adjustment

Adjust hue, saturation and brightness for each color in the RGB and CMY color models.

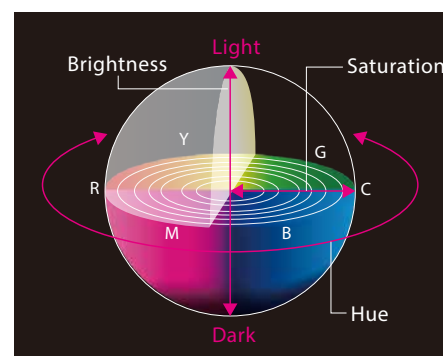

Flexible Installation

Borderless multi projection


Multiple geometric correction NEW

Project distortion-free images on surfaces such as corners, curved and spherical walls or other screen shapes. Some geometric correction can be adjusted simultaneously for fine-tuning settings.

Curved Surface and Corner Wall

Quickly and precisely correct vertical and/or horizontal distortion when projecting onto curved surfaces, and adjust the shape of images projected onto corners.

Curved surface

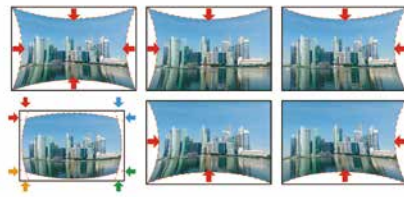


Corner surface



Multi-direction projection

EB-L1000 Series can be rotated 360° in any direction — horizontally, vertically and rotationally — without any loss in image brightness. This makes it ideal for a wide range of applications, such as projecting onto ceilings and floors.

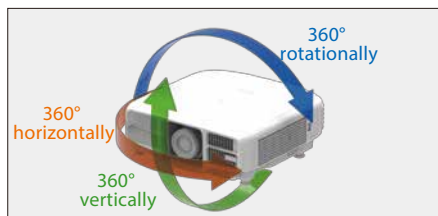

Web control with smart device support

Use a computer web browser or smart device to adjust projector settings. The newly designed OSD Control Pad function allows control of the OSD menu and even shows a representation of the lens-shift range on a smart device.



Simplified maintenance

Access the air filter and change lenses easily without the need for any special equipment.


Split Screen

Project two different images from one projector, such as one showing conference attendees and the other documents. WUXGA resolution ensures crisp, clean images of both for presentations brimming with impact.



Blanking

Adjust the blanking width for oversized images, or mask noise at the edges of the screen, especially images from a videocassette recorder. All edges are adjustable.

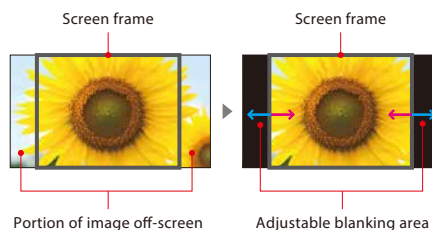

DMX-ArtNet

EB-L1000 Series supports DMX-ArtNet for synchronizing lighting effects (such as pre-programmed sequences) with audio. Items you can control include power shutter switchgear input source, lens drive (shift, focus and zoom) and lens memory settings.

Transferring OSD information


Reduce installation and setup time when using multiple projectors by transferring OSD settings — such as brightness and color settings as well as user logos — to multiple machines via USB or over a network.

Powered lens with stepping motor

The motorized lens shift covers a wide range, giving you a great deal of flexibility when installing the projector. A newly adopted stepping motor lets you make highly precise adjustments when employing edge blending, stacking and other techniques. Adjustments can be made via remote control or over a network, enhancing usability even for ceiling-mounted projectors.

Lens-position memory


Up to 10 settings can be stored in the projector memory, including shift positions, focus and projection sizes. This allows you to quickly adjust the projector depending mainly on the aspect ratio of content by using either the remote controller or command control.

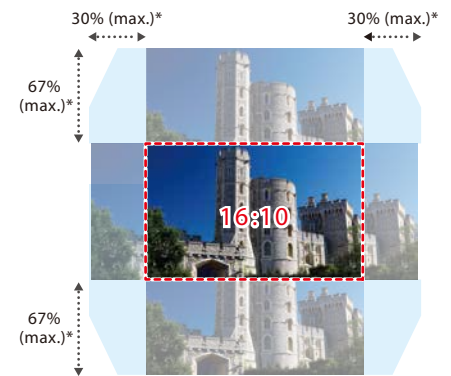

* ±60% vertically, ±18% horizontally for EB-L1505U

Zero offset, ultra short-throw lens

This lens is especially useful for environments with extremely limited lens-to-screen distances. The short throw ratio of 0.35 and the zero-offset, bending optical system enables projection onto 100-inch screens from only 74 cm away. These features combine with lens shift (+17% vertically, ±10% horizontally) to simplify operation and expand usability.

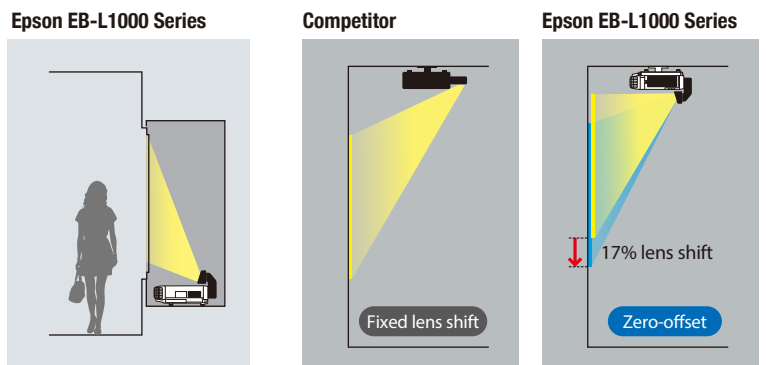


Larger image from shorter distances, plus added installation flexibility

Variety of optional lenses

An extensive lineup of optional lenses is available for any venue or subject. And with the new ELPLX01 zero offset, ultra short-throw lens, you can install the projector in tight spaces. All lenses also support future Epson G and L Series projectors.

- Notes:
- The throw ratio of ELPLM08 covers that of ELPLW06.
 - ELPLM08 and ELPLX01 do not support EB-L1505U / L1500U.
 - EB-G7000/EB-L1000 Series and EB-L1505U have different throw ratios.
 - The chart on the right is for EB-G7000 Series and EB-L1000 Series except EB-L1505U / L1500U.

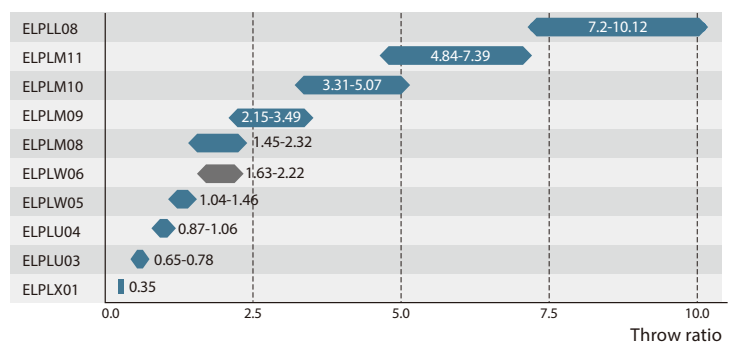

3G-SDI/HDBaseT* support

Support for 3G-SDI/HDBaseT provides Full HD video, audio and Ethernet while the 3G-SDI cable enables control from over 100 meters away in networks installed with Category 5e cable† and above — a smart solution for large venues.



* The HDBaseT and the HDBaseT Alliance logos are trademarks of the HDBaseT Alliance.
 † STP (Spanning Tree Protocol) is recommended.
 Note: Only EB-L1505U / L1500U support 3G-SDI.

Detecting input voltage


Confirm input voltage in real-time via the OSD or web browser. This helps avoid problems caused by voltage drops in large venues where a large amount of equipment may affect the power supply.

Note: L1505U / L1500U only

Excellent image quality

WUXGA — Going beyond Full HD


WUXGA resolution (1,920 x 1,200 pixels) enables display of Full HD video (1,920 x 1,080 pixels) images. Even large-screen projections exhibit sharp, vivid details for an incredibly dynamic viewing experience.

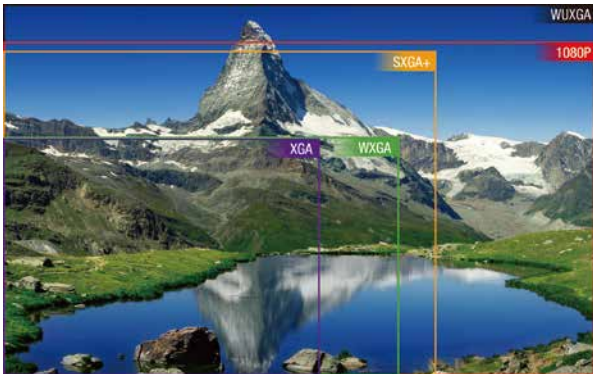

High-definition images with 4K Enhancement Technology

Support for 4K combined with Epson's 4K Enhancement Technology — which shifts pixels diagonally by 0.5 pixels to double resolution — delivers crisp, high-definition images.

Note: This function can only be used when the input signal is 1080p or higher, and is recommended for projecting HD videos only, not documents.

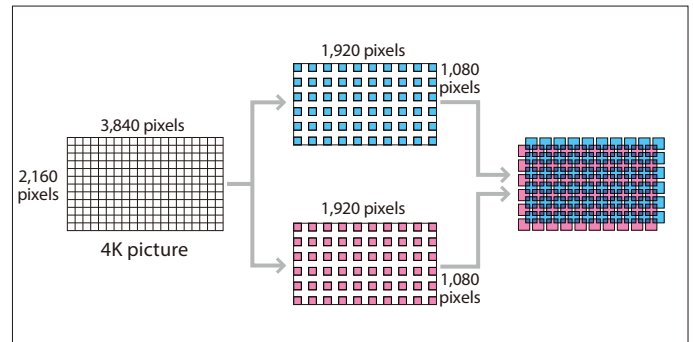

Varied product lineup with exceptional brightness

EB-L1000 Series has bright, high resolution projectors for nearly any application. The top-of-the-line projectors boast a maximum brightness of 12,000 lm, making them excellent for digital signage and large venues where maximum visibility is required.

2-2/4-4 Pull Down

These projectors automatically detect 1080p/24fps signals then reproduce the content in cinema-like quality.

Super-resolution with detail enhancement

Epson's Super-resolution Technology delivers razor-sharp images even when projecting low-resolution content onto large screens.



DICOM SIM mode

This color mode produces images with clear shadows, making it ideal for displaying X-rays and other medical images.

Note: This projector is not a medical device and cannot be used for medical diagnosis.

Without Super-resolution technology

With Super-resolution technology



* Simulated images

Without DICOM SIM mode

With DICOM SIM mode



* Simulated images



Superior image quality with 3LCD technology


All Epson projectors use 3LCD technology, offering distinct advantages compared to 1-chip projectors.

3LCD projectors are superior in light efficiency:

- Up to three times brighter color* reproduction
- Up to three times wider color gamut for excellent color reproduction
- No rainbow effect

3LCD projectors do not employ a color wheel found in 1-chip DLP® models†, thereby eliminating the annoying rainbow effect.

* Compared with leading Epson 3LCD business and education projectors as well as leading 1-chip DLP® projectors based on NPD data for June 2013 through May 2014 and PMA Research data for Q1 through Q3 2013. Color brightness (color light output) is measured in accordance with IDMS 15.4, and varies depending on usage conditions.
† DLP is a registered trademark or a trademark of Texas Instruments in the US and/or other countries.

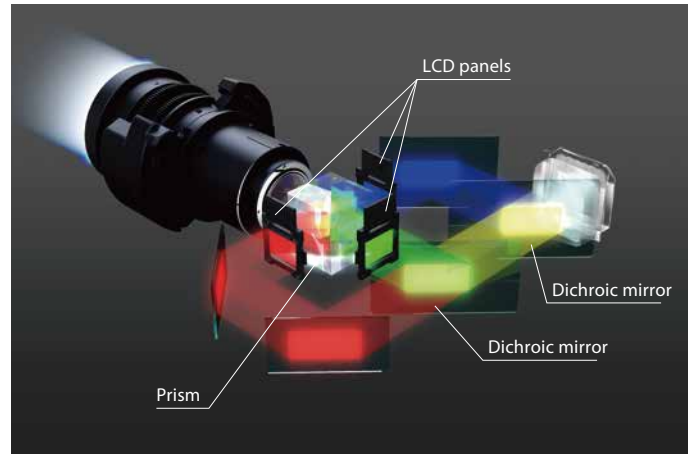

Brighter colors, smoother gradations


3LCD projectors produce brighter colors and smoother gradations compared to 1-chip DLP® units. This is because 3LCD projectors mix and project light from all three colors to form a single image. Conversely, 1-chip DLP® projectors create colors by filtering the light through a color wheel, then projecting each color one at a time — essentially relying on human color perception to mix and interpret the correct color.

Wider color gamut

HTPS panels — the core technology of 3LCD — deliver up to three times the color gamut of 1-chip DLP®, achieving brighter, more vibrant and accurate color reproduction.



Color gamut of 3LCD and 1-Chip DLP*

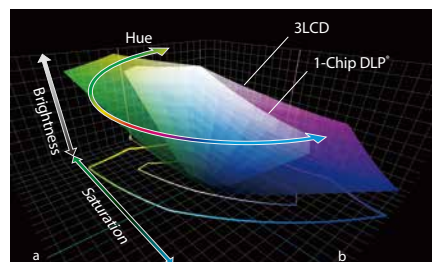

* These color gamut volumes reflect averages measured from leading 3LCD business and education projectors as well as 1-chip DLP® projectors, and are based on NPD data for June 2013 through May 2014. Volume is measured at the brightest 3D mode in the CIE L*a*b* coordinate space.


No rainbow effect

1-chip DLP® projectors can cause a rainbow in which 'false' colors are briefly perceived when the image (or the observer's eye) is moving. 3LCD projectors do not exhibit this since all three primary colors are displayed simultaneously.



Frame interpolation

By analyzing images frame-by-frame then generating intermediate frames, EB-L1000 Series delivers smooth video with less afterimages, even when projecting sports and other fast-moving subjects.

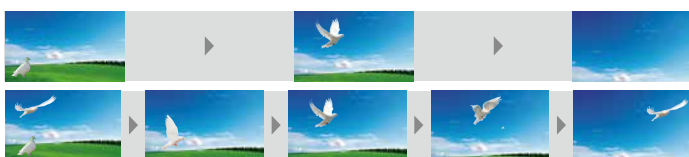

* Simulated images



* Simulated images

Specifications

				EB-L1300U	
Specification of Main Parts	LCD	Size		0.76-inch (D10)	
		Pixel Number		2,304,000 dots (1920 x 1200) x 3	
		Native Resolution		WUXGA(16:10)	
	Projection Lens	Type		Power zoom / Power focus / Power shift	
		F-Number/ Focal Length		1.7 - 2.3/ 24.02mm - 38.24mm	
	Light Source	Type		Laser Diode	
		LD Input Power		430W (Light Source mode:Normal, Environment Temperature:25°C)	
		Life (Normal/ Quiet/ Long)		20000 hours/ 20000 hours/ 30000 hours	
Screen Size (Projected Distance)	Optical System		Dichroic mirror separation & prism combine method		
	Zoom:Wide	50" to 300" [1.53m to 9.44m] (Zoom:W)			
Standard Zoom Lens	Zoom:Tele		50" to 300" [2.48m to 15.10m] (Zoom:T)		
			100" screen 3.11 m - 5.00 m		
Lens Shift Range	Vertical	Throw ratio: 1.45 (Zoom:W), 2.32 (Zoom:T)			
		Vertical: -67% to +67% (H Center) (Powered)			
		Horizontal: -30% to +30% (V Center) (Powered)			
Light Output (Brightness)				8000 lm	
Color Light Output (Color Brightness)				8000 lm	
Contrast			Dynamic Contrast: On	Over 2,500,000:1	
				(Color mode : Dynamic, Light Source mode:Normal, Zoom: Wide, Lens shift: Up to 1.07billion colors	
Color Reproduction				Dynamic/ Presentation/ Cinema/ sRGB/ DICOM SIM/ Multi-Projection	
Adjustment Function	Image	Color Mode		Dynamic/ Presentation/ Cinema/ sRGB/ DICOM SIM/ Multi-Projection	
		Frame Interpolation		Yes	
		Image Enhancement	4K Enhancement		Off, Full HD, WUXGA+
			Image Preset Mode		Yes
			Noise Reduction		Yes
			MPEG Noise Reduction		Off, Low, Normal, High
Super-resolution		Yes			
Detail Enhancement		Yes			
Internal Speaker(s)	Sound Output		10 W Monaural		
Effective Scanning Frequency Range (Analog)	Pixel Clock		13.5 MHz to 162 MHz,		
	Horizontal		Up to UXGA 60 Hz		
	Vertical		15 kHz to 92 kHz		
Effective Scanning Frequency Range (Digital)	Pixel Clock		13.5 MHz to 297MHz(4K)		
	Horizontal		Up to UXGA 60 Hz"		
	Vertical		15 kHz to 135 kHz(4K)		
Effective Scanning Frequency Range (SDI)	Pixel Clock		13.5 MHz to 148.5 MHz		
	Horizontal		up to 1080p 60 Hz		
	Vertical		15 kHz to 67.5 kHz		
	Settings		24Hz 30Hz 50 Hz 59.94Hz 60Hz		
	Geometric Correction		Off		
	V Keystone		-45 degrees to +45 degrees (Zoom:Tele with Standard Zoom Lens)		
H Keystone		-30 degrees to +30 degrees (Zoom:Tele with Standard Zoom Lens)			
Quick Corner		Yes			
Curved Surface		Yes			
Corner Wall		Yes			
Point Correction		Yes			
Analog RGB	Display Performance		Native	1920 x 1200 dots	
	Input Terminal		Video	D-sub 15pin x1, 5 BNC x1	
	Output Terminal		Video	D-sub 15pin x1	
HDMI	Display Performance		Native	1920 x 1200 dots	
	Input Terminal		Video	HDMI x1, DVI-D x1, HD-BaseT	
	Output Terminal		Video	N/A	
Control I/O	Serial I/O		Terminal	D-sub 9pin x1	
			Signal	RS-232C x1	
Network I/O	Wired LAN			RJ-45 x1	
	USB I/O		I/O Terminal	Type A (for Wireless LAN Unit)	
	Wireless LAN			Optional	
		Supported Speeds for each mode		IEEE 802.11b: 11 Mbps*/ IEEE 802.11g: 54 Mbps*/ IEEE 802.11n: 130 Mbps*	
Operating Temperature				0 °C to 45 °C <32°F to 113 °F> (0m / 0ft to 1500m / 4921ft)	
				0 °C to 40 °C <32°F to 104 °F> (over 1500m / 4921ft to 3048m / 10000ft)	
				(20% - 80% humidity, No condensation) ^	
				Thermal shut down	
				50 °C <122 °F> (0m / 0ft to 1500m / 4921ft)	
				45 °C <113 °F> (over 1500m / 4921ft to 3048m / 10000ft)"	
Operating Altitude				0 m to 3048 m(0 ft to 10000 ft) (over 1500 m / 4,921 ft :with High altitude mode)	
Start-up Period				Less than 7 seconds (Warm-up period: 30 seconds)	
Direct Power On				Yes	
Direct Power Off				Yes	
Auto Power On				Yes	
Cool-down Period				Instant off	
Power Supply Voltage				100 - 240 V AC +/- 10%, 50/60 Hz	
Power Consumption 220-240V		Lamp On (Normal/ Long)		625W/ 417W	
		Networked Standby/ Energy Saving		2.4W/ 0.28W	
Dimension		Exclude Feet (W x H x D) (Include Projection Lens)		586 x 185 x 492 mm	
Weight (Including Standard Lens)				Approx. 45.5 lbs./ 20.7 kg	
Fan Noise	Light Source Mode: Normal		35 dB		
	Light Source Mode: Quiet		29 dB		

* Maximum speed and range is achievable when used with same enhanced mode technology. Actual data rates, features and performance may vary depending on your computer system, the environment and other factors.


^ When environmental temperature becomes high, the brightness becomes dark automatically.

EB-L1200U	EB-L1100U	EB-L1405U	EB-L1505U/1500U
			1.03-inch (D10)
			1.8 - 2.5/ 36.00mm - 57.35mm
385W (Light Source mode:Normal, Environment Temperature:25°C)	290W (Light Source mode:Normal, Environment Temperature:25°C)	430W (Light Source mode:Normal, Environment Temperature:25°C)	670W (Light Source mode:Normal, Environment Temperature:25°C)
			60" to 500" [1.99m to 17.17m] (Zoom:W)
			60" to 500" [3.26m to 27.77m] (Zoom:T)
			100" screen 3.37 m - 5.49 m
			Throw ratio: 1.57 (Zoom:W), 2.56 (Zoom:T)
			Vertical: -60% to +60% (H Center) (Powered)
			Horizontal: -18% to +18% (Vertical±31%) (Powered)
7000 lm	6000 lm	8000 lm	12000lm
7000 lm	6000 lm	8000 lm	12000lm
V -50% or 50% / H Cente, Light Optimizer :ON)			
			N/A
			1 (Art-Net)
566W/ 384W	454W/ 313W	625W/ 417W	908W/ 597W
			2.3W/ 0.33W
Approx. 45.4 lbs./ 20.6 kg	Approx. 44.4 lbs./ 20.1 kg	Approx. 45.5 lbs./ 20.6 kg	Approx. 51.9 lbs./ 23.5 kg
34 dB		35 dB	39 dB
28 dB		29 dB	33 dB



The warranty service can be extended by purchasing Epson Coverplus Extended Warranty. For more information, please contact Epson customer support.

Specifications

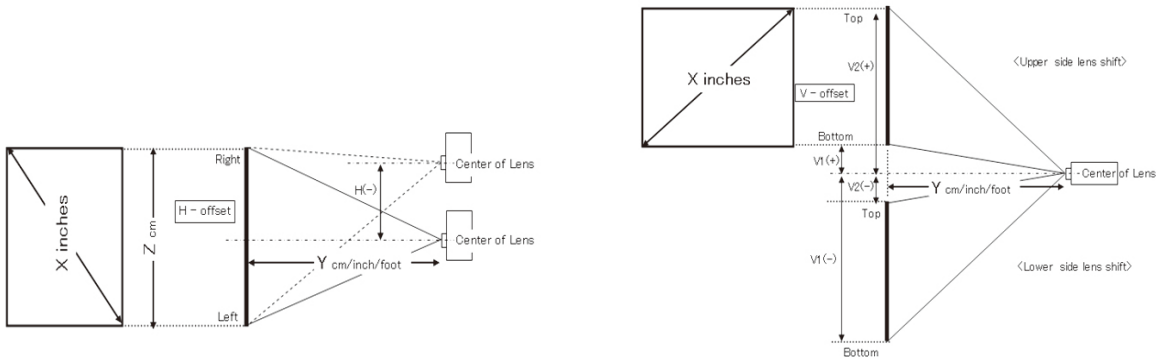

EB-L1505U / L1500U


16:10 Screen Size	ELPLU03		ELPLU04		ELPLW05		ELPLW06		ELPLM09	
	Short Throw Zoom Lens		Short Throw Zoom Lens		Wide Zoom Lens		Wide Zoom Lens		Standard Lens / Middle Throw Zoom Lens	
	Shortest (Wide)	Longest (Tele)	Shortest (Wide)	Longest (Tele)	Shortest (Wide)	Longest (Tele)	Shortest (Wide)	Longest (Tele)	Shortest (Wide)	Longest (Tele)
X (Screen size / dimension)	Y (cm / inch)		Y (cm / inch)		Y (cm / inch)		Y (cm / inch)		Y (cm / inch)	
60"	120cm x 90cm 47.2" x 35.4"		80 / 31	97 / 38			149 / 59	206 / 81	199 / 78	326 / 128
80"	160cm x 120cm 63.0" x 47.2"		108 / 43	131 / 52	129 / 51	182 / 72	202 / 79	277 / 109	268 / 105	438 / 172
100"	200cm x 150cm 78.7" x 59.1"		136 / 54	165 / 65	163 / 64	229 / 90	254 / 100	384 / 137	337 / 133	549 / 216
120"	244cm x 183cm 96" x 72"	122 / 48	148 / 58	165 / 65	199 / 79	197 / 77	276 / 109	306 / 121	419 / 165	406 / 160
150"	323cm x 202cm 127" x 80"	154 / 61	186 / 73			248 / 98	347 / 137			
200"	410cm x 300cm 161.4" x 118.1"	206 / 81	249 / 98	278 / 110	336 / 132	333 / 131	464 / 183	515 / 203	703 / 277	682 / 269
300"	610cm x 460cm 240.2" x 181.1"	311 / 122	374 / 147	420 / 166	507 / 200	504 / 198	699 / 275	777 / 306	1058 / 417	1027 / 404
400"	813cm x 610cm 320" x 240"	416 / 164	500 / 197			674 / 265	934 / 368			1663 / 655
500"	1077cm x 673cm 424" x 265"			704 / 277	848 / 334			1299 / 512	1769 / 696	1717 / 676
										2777 / 1093

16:10 Screen Size	ELPLM10		ELPLM11		ELPLL08		ELPLR04	
	Middle Throw Zoom Lens		Middle Throw Zoom Lens		Long Throw Lens		Rear Projection Wide Lens	
	Shortest (Wide)	Longest (Tele)	Shortest (Wide)	Longest (Tele)	Shortest (Wide)	Longest (Tele)	Shortest (Wide)	Longest (Tele)
X (Screen size / dimension)	Y (cm / inch)		Y (cm / inch)		Y (cm / inch)		Y (cm / inch)	
60"	120cm x 90cm 47.2" x 35.4"	306 / 121	473 / 186	445 / 175	686 / 270	664 / 261	941 / 370	87 / 34
80"	160cm x 120cm 63.0" x 47.2"	413 / 163	635 / 250	601 / 237	923 / 363	896 / 353	1265 / 498	118 / 46
100"	200cm x 150cm 78.7" x 59.1"	519 / 204	797 / 314	757 / 298	1160 / 457	1128 / 444	1589 / 626	149 / 59
120"	244cm x 183cm 96" x 72"	626 / 246	959 / 377	913 / 360	1396 / 550	1360 / 535	1913 / 753	180 / 71
150"	323cm x 202cm 127" x 80"							
200"	410cm x 300cm 161.4" x 118.1"	1052 / 414	1607 / 633	1538 / 605	2343 / 922	2287 / 901	3209 / 1264	304 / 120
300"	610cm x 460cm 240.2" x 181.1"	1585 / 624	2417 / 951	2319 / 913	3526 / 1388	3447 / 1357	4830 / 1920	460 / 181
400"	813cm x 610cm 320" x 240"							
500"	1077cm x 673cm 424" x 265"	2650 / 1043	4036 / 1589	3881 / 1528	5892 / 2320	5765 / 2270	8071 / 3178	771 / 303

EB-L1100U / EB-L1200U / EB-L1300U / EB-L1405U

16:10 Screen Size	ELPLX01		ELPLU03		ELPLU04		ELPLW05		ELPLW06	
	Ultra Short Throw Lens		Short Throw Zoom Lens		Short Throw Zoom Lens		Wide Zoom Lens		Wide Zoom Lens	
	Shortest (Wide)	Longest (Tele)	Shortest (Wide)	Longest (Tele)	Shortest (Wide)	Longest (Tele)	Shortest (Wide)	Longest (Tele)	Shortest (Wide)	Longest (Tele)
X (Screen size / dimension)	Y (cm / inch)		Y (cm / inch)		Y (cm / inch)		Y (cm / inch)		Y (cm / inch)	
60"	120cm x 90cm 47.2" x 35.4"				111 / 44	134 / 53	132 / 52	187 / 73	207 / 82	284 / 112
80"	160cm x 120cm 63.0" x 47.2"				149 / 59	181 / 71	178 / 70	251 / 99	279 / 110	381 / 150
100"	200cm x 150cm 78.7" x 59.1"	74 / 29		140 / 55	168 / 66	188 / 74	227 / 89	225 / 88	315 / 124	350 / 138
120"	244cm x 183cm 96" x 72"	89 / 35		169 / 66	203 / 80	227 / 89	274 / 108	271 / 107	379 / 149	422 / 166
150"	323cm x 202cm 127" x 80"	113 / 44		212 / 83	255 / 100					
200"	410cm x 300cm 161.4" x 118.1"	152 / 60		283 / 112	341 / 134	382 / 151	460 / 181	457 / 180	636 / 250	708 / 279
250"	538cm x 337cm 212" x 133"	192 / 75		355 / 140	427 / 168					
300"	610cm x 460cm 240.2" x 181.1"	231 / 91		247 / 168	513 / 202	576 / 227	693 / 273	690 / 272	956 / 376	1066 / 420
350"	754cm x 471cm 297" x 186"	270 / 106								
400"	813cm x 610cm 320" x 240"	310 / 122								

16:10 Screen Size	ELPLM08		ELPLM09		ELPLM10		ELPLM11		ELPLL08		ELPLR04	
	Standard Lens		Standard Lens / Middle Throw Zoom Lens		Middle Throw Zoom Lens		Middle Throw Zoom Lens		Long Throw Lens		Rear Projection Wide Lens	
	Shortest (Wide)	Longest (Tele)	Shortest (Wide)	Longest (Tele)	Shortest (Wide)	Longest (Tele)	Shortest (Wide)	Longest (Tele)	Shortest (Wide)	Longest (Tele)	Shortest (Wide)	Longest (Tele)
X (Screen size / dimension)	Y (cm / inch)		Y (cm / inch)		Y (cm / inch)		Y (cm / inch)		Y (cm / inch)		Y (cm / inch)	
60"	120cm x 90cm 47.2" x 35.4"	185 / 73	298 / 117	276 / 109	447 / 176	425 / 167	649 / 255	618 / 243	945 / 372	920 / 362	1295 / 510	121 / 48
80"	160cm x 120cm 63.0" x 47.2"	248 / 98	399 / 157	370 / 146	599 / 236	571 / 225	869 / 342	832 / 328	1268 / 499	1237 / 487	1737 / 684	163 / 64
100"	200cm x 150cm 78.7" x 59.1"	311 / 123	500 / 197	465 / 183	751 / 296	717 / 282	1090 / 429	1046 / 412	1591 / 626	1555 / 612	2180 / 858	206 / 81
120"	244cm x 183cm 96" x 72"	374 / 147	601 / 237	560 / 220	903 / 355	863 / 340	1311 / 516	1260 / 496	1913 / 753	1872 / 737	2622 / 1032	248 / 98
150"	323cm x 202cm 127" x 80"											
200"	410cm x 300cm 161.4" x 118.1"	627 / 247	1005 / 396	938 / 369	1510 / 595	1447 / 570	2193 / 863	2116 / 833	3205 / 1262	3141 / 1237	4391 / 1729	417 / 164
250"	538cm x 337cm 212" x 133"											
300"	610cm x 460cm 240.2" x 181.1"	943 / 371	1510 / 595	1411 / 556	2269 / 893	2177 / 857	3296 / 1298	3186 / 1254	4819 / 1897	4728 / 1861	6602 / 2599	629 / 248
350"	754cm x 471cm 297" x 186"											
400"	813cm x 610cm 320" x 240"											

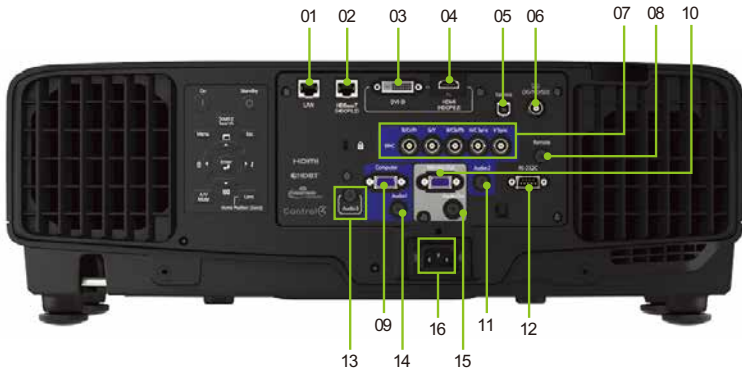

Multimedia Projector

EB-L1505U / L1500U / L1405U / L1300U / L1200U / L1100U

- 01 LAN
- 02 HDBaseT with HDCP2.2
- 03 DVI-D
- 04 HDMI with HDCP2.2
- 05 Service Port
- 06 SDI- 3G/ HD/ DG (For EB-L1405U & EB-L1505U)
- 07 5BNC
- 08 Wired Remote Jack
- 09 Computer (D-SUB15)
- 10 Monitor Out
- 11 Audio 2
- 12 RS-232C
- 13 Audio 3
- 14 Audio 1
- 15 Audio Out
- 16 Power Inlet

Precautions when a Using Laser Device

This projector is a class 1 laser product that complies with the IEC60825-1:2014 international standard on lasers. If they are not handled correctly, injuries could occur. Note the following points.

Warning

- If an error occurs in the projector, turn off the power immediately, unplug the projector from the outlet, and contact your local dealer or the nearest Epson repair center. Continuing to use it in an error condition may result in an electric shock, fire, or visual impairment.
- Never attempt to disassemble or modify the projector. The projector contains a high-power laser component. This could cause serious injury.
- Do not look into the lens during projection. Also, do not look into the lens using optical devices (such as a magnifying glass or telescope). This could cause visual impairment.
- When turning on the projector at a distance using the remote control, make sure there is no one looking into the lens.
- Do not allow small children to make operations. If children do make operations, they must be accompanied by an adult.
- Do not apply optical devices, such as a magnifying glass or reflector, to the projected image. Continuing to use it in this condition may result in physical harm. It could also cause a fire or an accident.
- Before starting projection, check that there is nothing in the surrounding area that could reflect the projected image.
- When disposing of the projector, do not disassemble it. Dispose in accordance with your local or national laws and regulations.




2 Year Onsite Warranty Service to be provided for local purchase only.

The warranty service can be extended by purchasing Epson Coverplus Extended Warranty. For more information, please contact Epson customer support.

For Standard warranty terms & conditions, please refer to <https://www3.epson.com.hk/eservice/tcs.html>

Bold, Bright, Beautiful...3LCD Technology

3LCD technology achieves bright, natural images and smooth, sharp video playback. No color break-up makes images gentle on the eyes.



Optical unit with high light-use efficiency

PROJECTION DISTANCE OF STANDARD LENS

EB-L1505U / L1500U

16:10 Screen Size	Shortest (Wide)	Longest (Tele)	Offset
X (Screen size / dimension)	Y (cm / inch)		Z (cm / inch)
60" / 125cm x 81cm 50.9" x 31.8"	199 / 78	326 / 128	-89-8 / -35-3.2
80" / 172cm x 108cm 67.8" x 42.4"	268 / 105	438 / 172	-119-11 / -46.7-4.3
100" / 215cm x 135cm 84.8" x 53.0"	337 / 133	549 / 216	-148-14 / -58.3-5.3
200" / 431cm x 269cm 169.6" x 106.0"	682 / 269	1106 / 436	-296-27 / -116.7-10.7
300" / 646cm x 404cm 254.4" x 159.0"	1027 / 404	1663 / 655	-444-41 / -175-16
500" / 1077cm x 673cm 424" x 265"	1717 / 676	2777 / 1093	-741-68 / -291.7-26.7

EB-L1100U / EB-L1200U / EB-L1300U / EB-L1405U

16:10 Screen Size	Shortest (Wide)	Longest (Tele)	Offset
X (Screen size / dimension)	Y (cm / inch)		Z (cm / inch)
60" / 125cm x 81cm 50.9" x 31.8"	185 / 73	298 / 117	-95-14 / -37.4-5.6
80" / 172cm x 108cm 67.8" x 42.4"	248 / 98	399 / 157	-127-19 / -49.9-7.5
100" / 215cm x 135cm 84.8" x 53.0"	311 / 123	500 / 197	-158-24 / -62.4-9.4
200" / 431cm x 269cm 169.6" x 106.0"	627 / 247	1005 / 396	-317-48 / -124.7-18.7
300" / 646cm x 404cm 254.4" x 159.0"	943 / 371	1510 / 595	-475-71 / -187.1-28.1

SUPPLIED ACCESSORIES

Power Cable	3m
Computer Cable	1.8 m
Remoted Control with alkaline batteries	AA type x 2
Cable Cover	
Epson Projector Software	

OPTIONAL LENS

ELPLX01	Ultra Short Throw Lens
ELPLU03	Short Throw Zoom Lens
ELPLU04	Short Throw Zoom Lens
ELPLW05	Wide Zoom Lens
ELPLW06	Wide Zoom Lens
ELPLM08	Standard Lens
ELPLM09	Middle Throw Zoom Lens
ELPLM10	Middle Throw Zoom Lens
ELPLM11	Middle Throw Zoom Lens
ELPLL08	Long Throw Lens

OPTIONAL ACCESSORIES

ELPLP93	Spare Lamp
ELPAF51	Air Filter
ELPAP10	Wireless LAN unit
ELPAP09	Quick Wireless Connection USB Key
ELPHD01	HDBaseT Transmitter
ELPPL01	Polarizers
ELPGS02A	Passive 3D Glasses for Adult (1 set of 5)
ELPGS02B	Passive 3D Glasses for Child (1 set of 5)
ELPMB47	Ceiling Mount
ELPMB48	Ceiling Mount

EPSON

EXCEED YOUR VISION



R & B COMPUTER SYSTEMS LTD.

力衡電腦系統有限公司

☎ **2749 3325**

🛒 www.rnb.com.hk
✉ rnb@rnb.com.hk

Unit 1009, Global Gateway Tower, 63 Wing Hong Street, Cheung Sha Wan, Kln., HK
香港九龍長沙灣永康街 63 號 Global Gateway Tower 1009 室

Epson Hong Kong Limited

Unit 715-723, 7/F Trade Square, 681 Cheung Sha Wan Road, Cheung Sha Wan, Kowloon, H.K.

* Please call our sales hotlines for demonstration at our showroom.

Epson Authorized Collection Point
(Hong Kong Island)
Room 1003, Block B, Sea View Estate,
4-6 Watson Road, North Point, Hong Kong

Epson Authorized Collection Point
(Kowloon)
Room 1006-1008, Park-In Commercial Centre,
56 Dundas Street, Mong Kok, Kowloon, Hong Kong

Epson Authorized Customer Service Centre
(Kowloon East)
Wah Fung Computer Services Ltd.
Unit 901, 9/F, Westin Centre, 26 Hung To Road,
Kwun Tong, Kowloon, Hong Kong

Epson Authorized Collection Point
(New Territories)
Unit 7, 21/F, CCT Telecom Building,
11 Wo Shing Street, Fo Tan, New Territories

HK Sales Hotline : (852) 2827 8711
HK Technical Hotline : (852) 2827 8911
Macau Hotline : (853) 2850 8065

URL: www.epson.com.hk

JUN16-01-PROJECTOR